








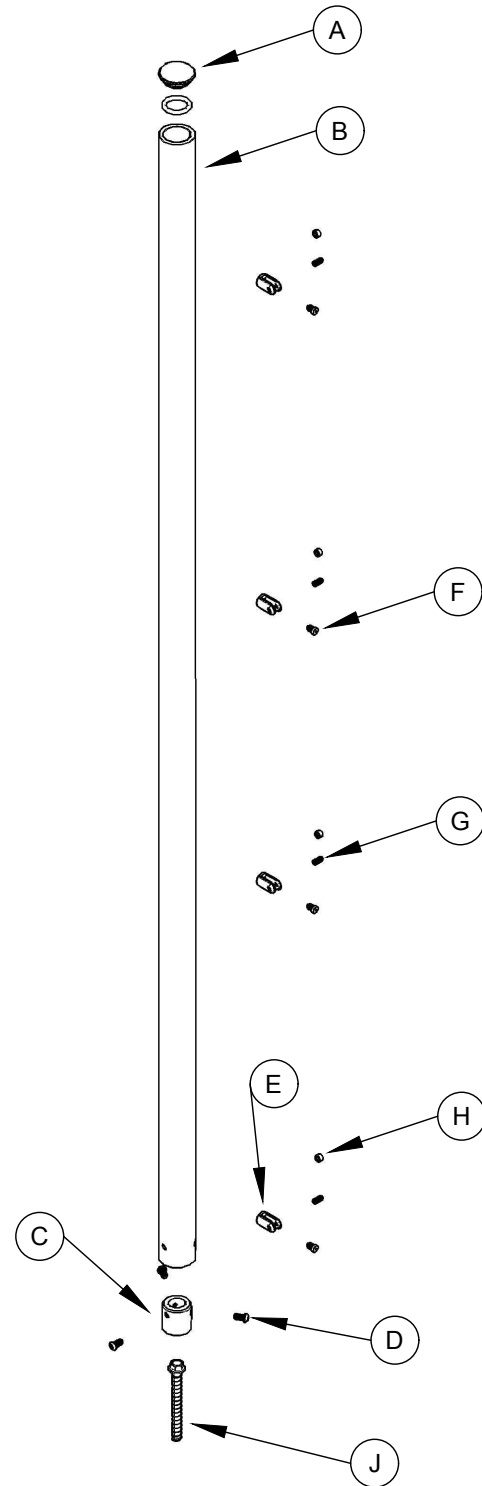


<b>A</b> 	<b>J</b> 
<b>B</b> 	
<b>C</b> 	
<b>D</b> 	
<b>E</b> 	
<b>F</b> 	
<b>G</b> 	
<b>H</b> 	





# FREE STANDING POST PARTITION

400.00 | Installation Instructions

These drawings have not been reviewed and approved by the architect and cannot ever be used for construction purposes. These drawings are for the exclusive use of Lumicor. Any use of these drawings by others will be at their own risk and lumicor will not be responsible for issues that may arise from their use.


© Lumicor 2019 — All Rights Reserved. For more information, visit [www.lumicor.com](http://www.lumicor.com) or call 1.888.LUMICOR (888.586.4267)

Solution 400.00
12/20/19
Page 1 of 2



## **INSTALLATION INSTRUCTIONS**

1. USING A  $\frac{1}{2}$ " MASONRY BIT, DRILL TO A MINIMUM DEPTH OF 6" THROUGH THE BOTTOM OF YOUR MOUNTS.
2. THREAD THE ANCHOR THROUGH THE BASE OF THE MOUNT SECURING IT TO YOUR SUBSTRATE.
3. PLACE ONE POST OVER THE MOUNTING BASE AND FASTEN THE 3 BUTTON HEAD SCREWS FROM THE OUTSIDE. BE SURE TO ALIGN YOUR GRIPPER HOLES THE DIRECTION THE PANEL IS TO BE INSTALLED.
4. MOUNT GRIPPERS PROVIDED TO THE POST AT THE PREDRILLED LOCATIONS.
5. INSTALL THE PANEL BY LINING UP THE PREDRILLED HOLES IN THE PANEL WITH THE GRIPPERS. INSERT THE CUP POINT SCREWS THROUGH THE GRIPPERS & PANEL.
6. INSURE THE PANEL IS SECURED AND SUPPORTED BEFORE INSTALLING THE SECOND POST.
7. PLACE THE SECOND POST ON THE BASE MOUNT AND FASTEN THE 3 BUTTON HEAD SCREWS FROM THE OUTSIDE. BE SURE TO ALIGN YOUR GRIPPER HOLES WITH THE HOLE LOCATIONS ON THE LUMICOR PANEL.
8. SCREW IN THE CUP POINT SCREWS THROUGH THE PANEL ON THE SECOND SET OF GRIPPERS.
9. FINISH BY INSERTING THE TOP CAPS TO ALL POSTS.

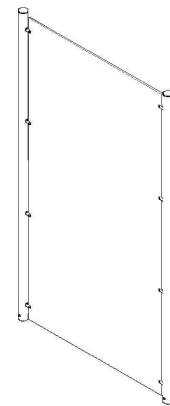

**Lumicor.**

## **FREE STANDING POST PARTITION**

400.00 | Installation Instructions

These drawings have not been reviewed and approved by the architect and cannot ever be used for construction purposes. These drawings are for the exclusive use of Lumicor. Any use of these drawings by others will be at their own risk and lumicor will not be responsible for issues that may arise from their use.

© Lumicor 2019 — All Rights Reserved. For more information, visit [www.lumicor.com](http://www.lumicor.com) or call 1.888.LUMICOR (888.586.4267)

Solution  
400.00

12/20/19

Page 2 of 2